

NBR: from -20°C to 100°C
VITON: from -20°C to 205°C
EPDM: from -40°C to 130°C



20 Bar




Compressed air, water, gases, not aggressive mineral or synthetic oils in uncorrosive environments and fluids compatible with construction materials



Parallel BSPP UNI ISO 228/1 from G1/8" to G1"



One way fluids flow.
 Indication of the fluid direction engraved on the body.

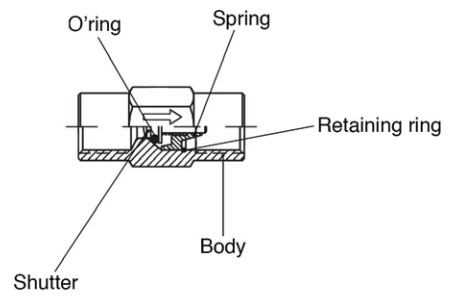

Body: yellow brass OT 58
Shutter: yellow brass OT 58
Spring: AISI 302
O'ring: NBR
Retaining ring: AISI 302

ADVANTAGES

- Available with VITON or EPDM o'rings.
- On demand available different springs for different opening pressures.
- Available to be supplied degreased.
- Available on demand also for NPT thread.



Products in compliance with the directive 2002/95/EC

MINIMUM OPEN PRESSURE


1/8	1/4	3/8	1/2	3/4	1
0.35	0.30	0.25	0.08	0.10	0.80

RoHS2

Products in compliance with the directive 2011/65/EU

1705

Check valve BSPP thread in yellow brass



CODE	T	L	H	GR.
1705TR18	G1/8"	40,0	17	52,0
1705TR14	G1/4"	41,0	17	45,0
1705TR38	G3/8"	47,0	22	90,0
1705TR12	G1/2"	56,0	27	153,0
1705TR34	G3/4"	66,5	34	285,0
1705TR1	G1"	79,0	40	388,0

