

0°C ÷ 60°C



Working pressure: 10 Bar
Negative pressure: -750mmHg



Compressed air & vacuum



Taper gas BSPT ISO 7
 from R1/8" to R1/2"



Polyurethane



Acetal resin



Products in compliance with
 the directive 2002/95/EC


RoHS2

Products in compliance with
 the directive 2011/65/EU

PRECAUTIONS

- The products are made in plastic and it's necessary to use teflon coating over the thread for installation in order to prevent air leakage. Be sure to prevent excessive torque when screwing the fittings.
- To connect the tube, insert the tube to the end and tight the cap before use.
- Cut the pressed part of the tube before connection to reuse the released tube
- Do not use in water applications

CONSTRUCTION MATERIALS

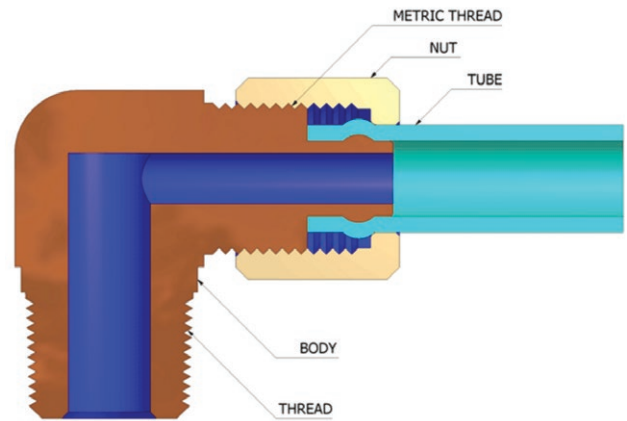

PUES



SIZE								
4X2,5	PUES0425AZ	PUES0425NE	PUES0425RO	PUES0425GL	PUES0425VD	PUES0425TR	PUES0425AZTR	PUES0425SL
6X4	PUES0604AZ	PUES0604NE	PUES0604RO	PUES0604GL	PUES0604VD	PUES0604TR	PUES0604AZTR	PUES0604SL
8X5,5	PUES0855AZ	PUES0855NE	PUES0855RO	PUES0855GL	PUES0855VD	PUES0855TR	PUES0855AZTR	PUES0855SL
10X6,5	PUES1065AZ	-	-	PUES1065GL	-	-	-	-
12X8	PUES1208AZ	PUES1208NE	-	PUES1208GL	-	-	-	-

