

-10°C ÷ +80°C



20 Bar



Compressed air, oil and fluids suitable with construction materials



Parallel gas BSPP ISO 228 from G1/8" to G1/2"  
Metric ISO 262 - M5



Aluminum with tumbling  
Anodized on demand

Available on demand and drawing distribution manifolds customized




Products in compliance with the directive 2002/95/EC

**RoHS2**

Products in compliance with the directive 2011/65/EU

**4100**


Aluminum tee cross

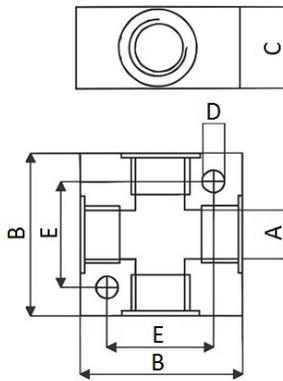

CODE	A	B	C	D	E	GR.
4100TR18	G1/8"	25,0	16,0	4,5	17,0	17,5
4100TR14	G1/4"	40,0	20,0	5,5	26,0	60,0
4100TR38	G3/8"	40,0	25,0	5,5	26,0	70,0
4100TR12	G1/2"	50,0	30,0	5,5	34,0	129,0

**4150**

Aluminum single distribution manifold

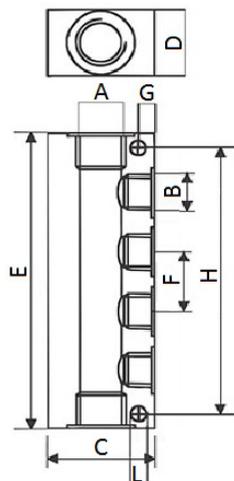

CODE	A	B	C	D	E	F	G	H	L	GR.
4150TR18M52	G1/8"	M5-2	25,0	16,0	45,0	15,0	3,5	33,0	4,5	38,0
4150TR18M53	G1/8"	M5-3	25,0	16,0	60,0	15,0	3,5	48,0	4,5	50,0
4150TR18M54	G1/8"	M5-4	25,0	16,0	75,0	15,0	3,5	63,0	4,5	64,0
4150TR18M55	G1/8"	M5-5	25,0	16,0	90,0	15,0	3,5	78,0	4,5	79,0
4150TR18M56	G1/8"	M5-6	25,0	16,0	105,0	15,0	3,5	93,0	4,5	90,0
4150TR14182	G1/4"	G1/8"-2	30,0	20,0	54,0	18,0	4,5	45,0	4,5	64,0
4150TR14183	G1/4"	G1/8"-3	30,0	20,0	72,0	18,0	4,5	63,0	4,5	86,0
4150TR14184	G1/4"	G1/8"-4	30,0	20,0	90,0	18,0	4,5	81,0	4,5	110,0
4150TR14185	G1/4"	G1/8"-5	30,0	20,0	108,0	18,0	4,5	99,0	4,5	130,0
4150TR14186	G1/4"	G1/8"-6	30,0	20,0	126,0	18,0	4,5	117,0	4,5	154,0

